

MANUALLY OPERATED



LK-1 HS For the use of Bi-metallic Bandsaw Blades

STADARD FEATURES & ACCESSORIES

- Complete with Electricals ie., Saw drive Electric Motor, Coolant pump, On off Contactor with Push Buttons
- V-belt Pulleys with V-belt
- Job Stopper
- Oil Field Gearbox & Hydraulic Cylinder
- Friction Type Chip Removal Wire Brush


OPTIONAL ACCESSORIES

- Chip Removal Wire Brush
- Bi-metal Bandsaw Blades
- Carbon Stèel Bandsaw Blades
- Job Roller Stand
- Mechanical Job Feeder Unit

Manually Operated

SPECIFICATION	LK-1 HS	LK-251 HS	LK-2 HS
CUTTING CAPACITY (UNIT)			
Round (mm)	205	250	315
Square (mm)	175 x 175	225 x 225	275 x 275
Rectangle (mm)	220 x 100 / 200 x 150	250 x 175	300 x 250
Blade Dimensions (mm)	3000 x 27 x 0.9	3300 x 27 x 0.9	3760 x 27 x 0.9
Power Req. (440 V AC, 50 Hz)	1.0 HP	1.5 HP	2.0 HP
Dimensions (L x W x H) mtr.	1.7 x 0.6 x 0.9	1.8 x 0.7 x 1	2.4 x 0.9 x 1.1
Net Weight (kg)	320	375	760

MANUALLY OPERATED

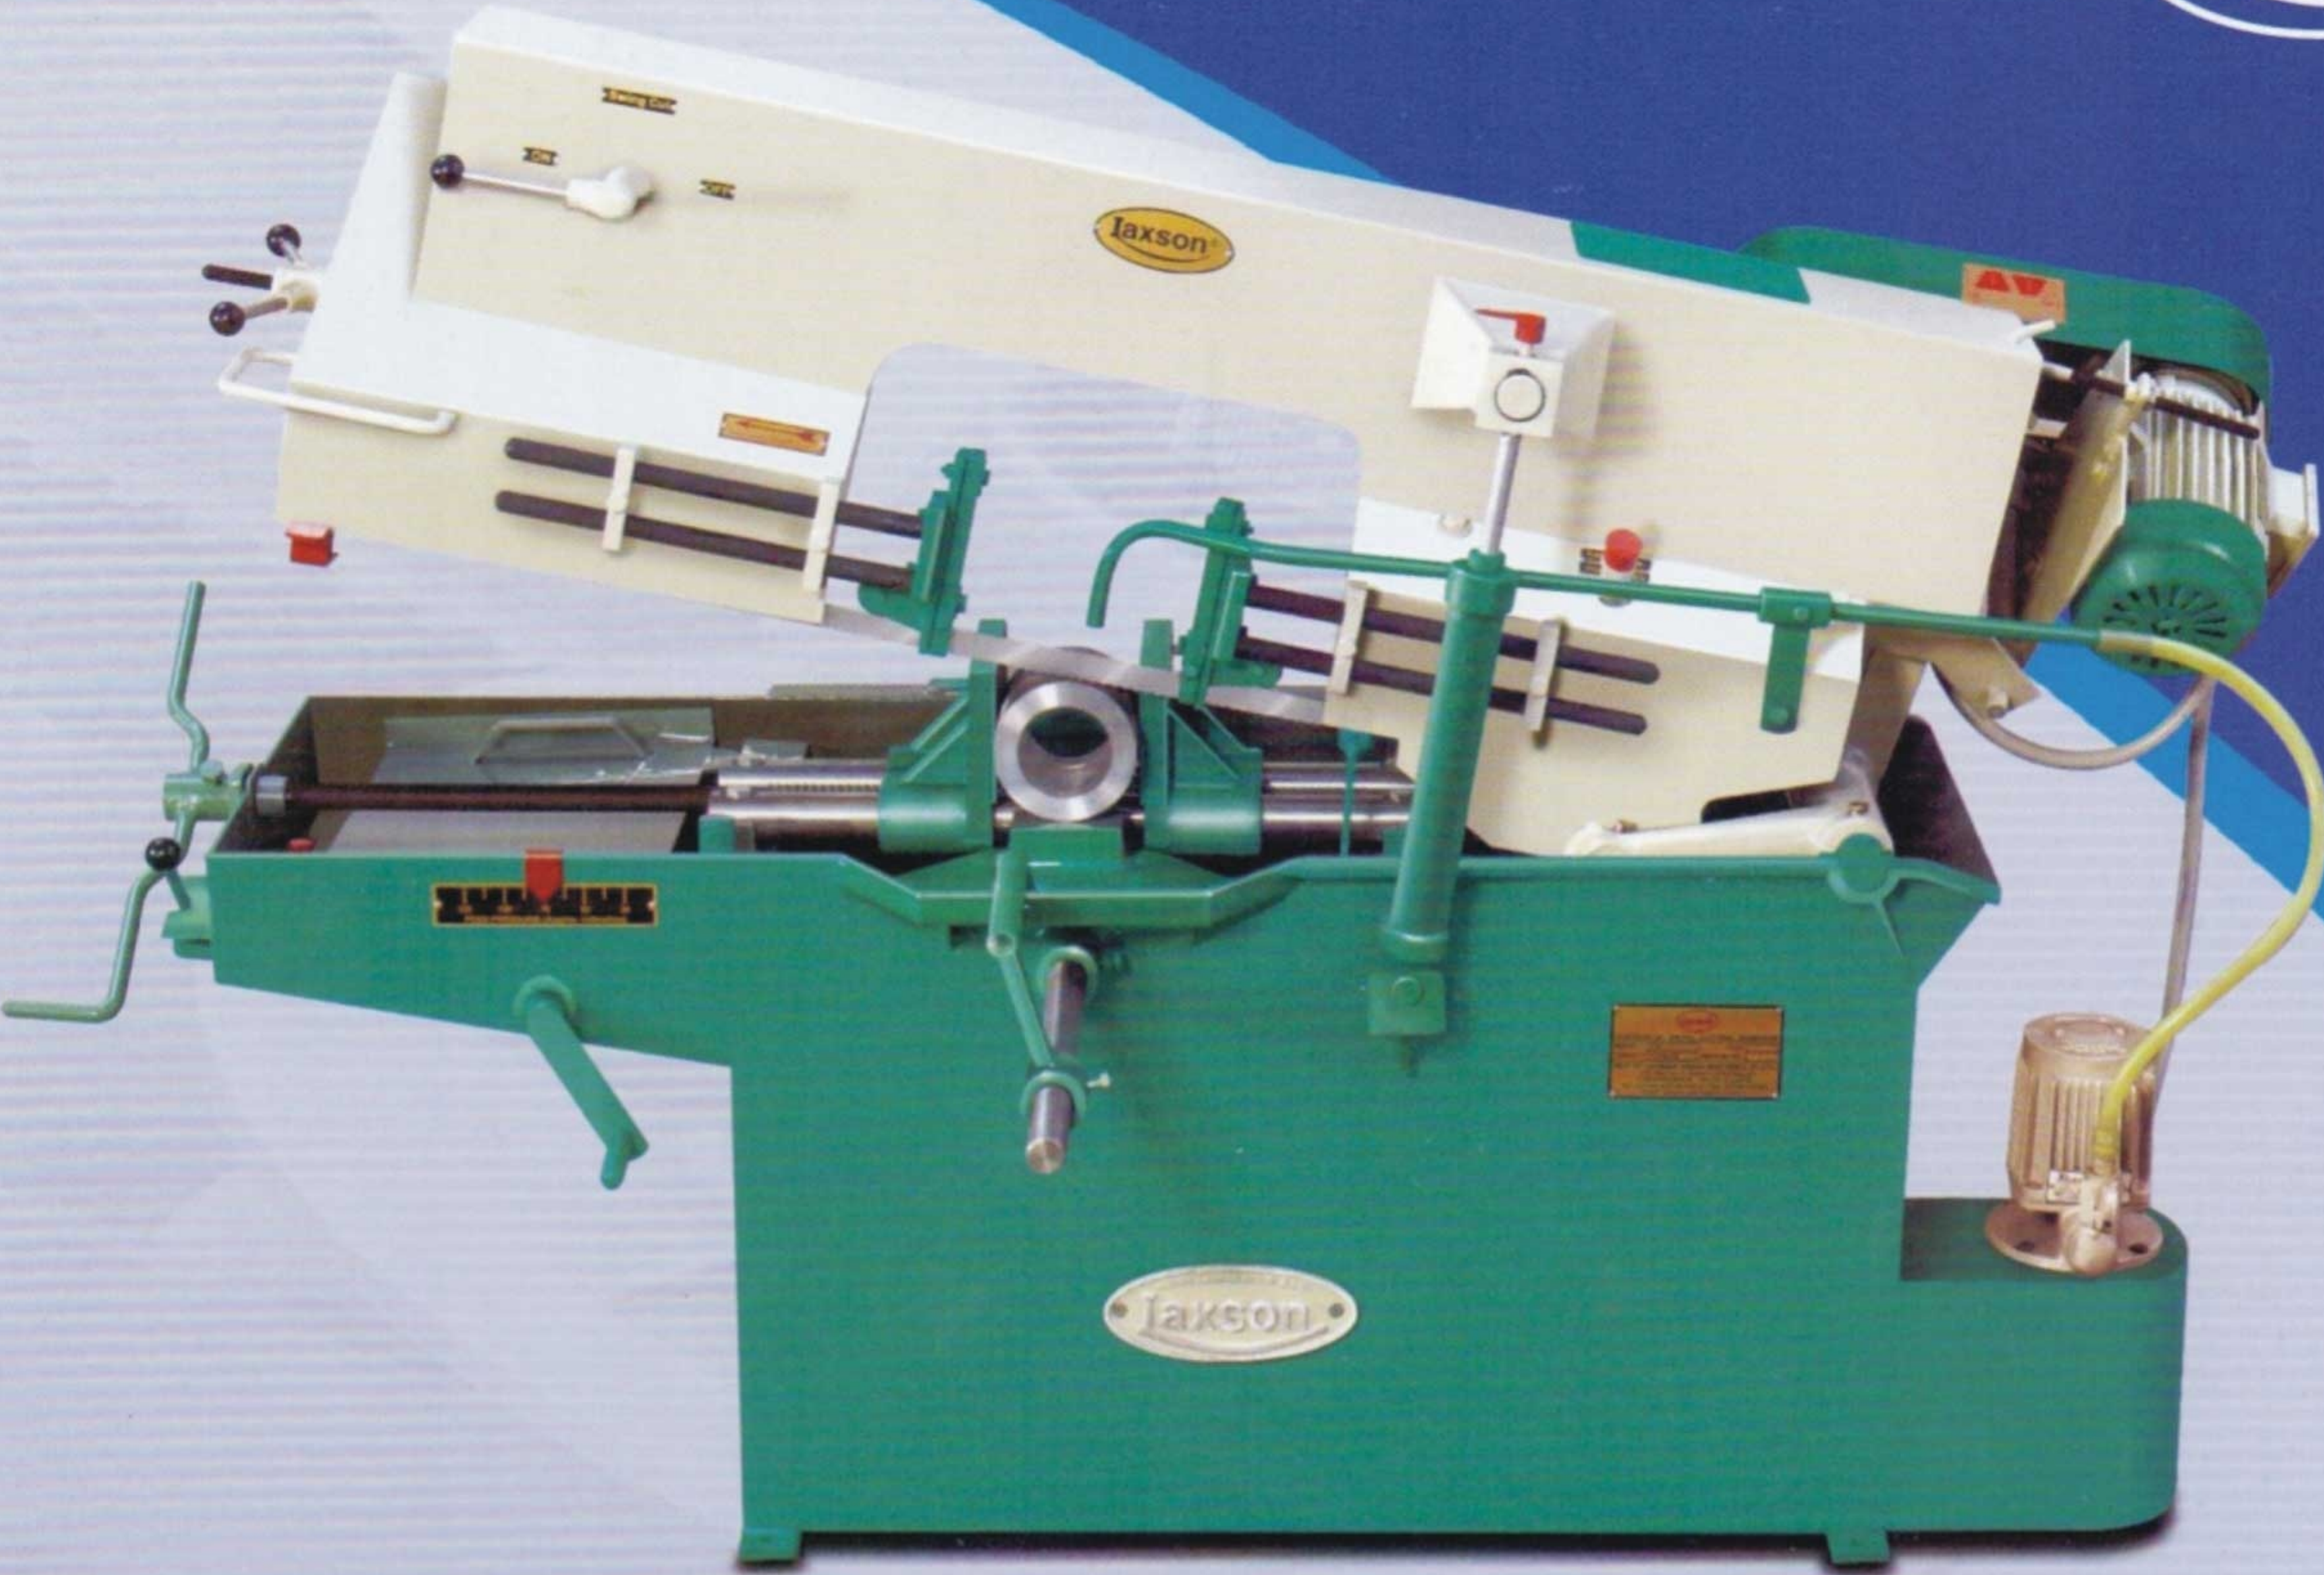

LK-2 HS For the use of Bi-metallic Bandsaw Blades



Adjustable cutting feed control valve



Adjustable cutting pressure regulator (Spring tension) for cutting pressure adjustment



Chip removing wire brush assembly for longer Blade life



Chip collecting tray for easy cleaning



Improved blade guide mechanism (Carbide & bearings for HS models)

Manually Operated

SPECIFICATION	LK-3 HS	LK-4 HS	LK-5 HS
CUTTING CAPACITY (UNIT)			
Round (mm)	350	400	450
Square (mm)	300 x 300	400 x 400	450 x 450
Rectangle (mm)	400 x 200	450 x 350	500 x 350
Blade Dimensions (mm)	4100 x 34 x 1.1	4420 x 34 x 1.1	4570 x 34 x 1.1
Power Req. (440 V AC, 50 Hz)	2.0 HP	2.0 HP	2.0 HP
Dimensions (L x W x H) mtr.	2.6 x 0.9 x 1.1	2.7 x 0.9 x 1.2	2.8 x 0.9 x 1.2
Net Weight (kg)	820	900	950